



FOOD TRANSFER PUMP (GTP) 3''



GTP's Specifications

- * Max product flow : 30 m³/h
- * Max product temperature : 60°C
- * Max working pressure : 3 bar
- * Max power : 4 kw

Field of Applications

- * Olive, Pickle(Gherkin), Tomato Paste
- * Cherie, Apricot
- * Live Fish, Shrimp,
- * Sludge, Animal and industrial waste


Special design impeller and body ;
In undamaged shipment of food grains and juicy,
It can be used in handling liquids in the slurry,
Transfer pump

GTP and ZTP 's Properties

- * In the air suction pipe to discharge himself.
- * Live fish transfer, is the best example of the practical sensitivity (for GTP)
- * All 316 stainless steel is hygienic due to its structure ,
- * Different mechanical seal applications are available depending on the type of fluid used,
- * It does not air during operation.
- * Suction and discharge flanges
ISO 7005-2 / PN 16, PN 25
DIN 2533 / PN 16, it is appropriate.
- * Remote control the speed (frequency control) control system available

MODEL	POWER	RPM	H (Total Head mSS) = m										Q (Volumetric Flow Rate) = m ³ /h														
	kw	d/d	H	3	4	8	12	16	18	20	24	27	30	3	4	6	8	10	12	14	16	18	20	24	27	30	
GTP (3'')	4	1500	Q	5	3																						
		1750		12	9	6	3																				
		2000		20	15	10	6																				
		2250		26	24	20	16	14	7																		
		2500		28	26	23	20	15	12	10																	
		2850				30	27	25	20	17	14	9	6														

Values are taken for "WATER" in figure above.

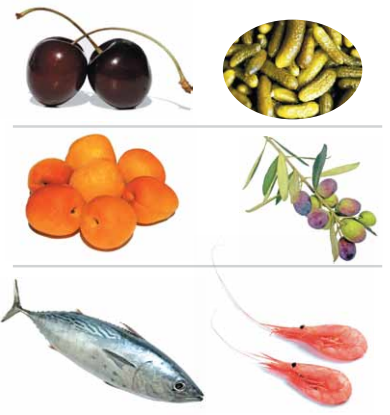

FOOD TRANSFER PUMP (GTP) 4''



GTP's Specifications

- * Max product flow : 70 m³/h
- * Max product temperature : 60°C
- * Max working pressure : 3 bar
- * Max power : 7,5 kw

Field of Applications


- * Olive, Pickle(Gherkin), Tomato Paste
- * Cherie, Apricot
- * Live Fish, Shrimp,
- * Sludge, Animal and industrial waste

Special design impeller and body ;

In undamaged shipment of food grains and juicy,
It can be used in handling liquids in the slurry,
Transfer pump

GTP and ZTP 's Properties

- * In the air suction pipe to discharge himself.
- * Live fish transfer, is the best example of the practical sensitivity (for GTP)
- * All 316 stainless steel is hygienic due to its structure ,
- * Different mechanical seal applications are available depending on the type of fluid used,
- * It does not air during operation.
- * Suction and discharge flanges
ISO 7005-2 / PN 16, PN 25
DIN 2533 / PN 16, it is appropriate.
- * Remote control the speed (frequency control) control system available

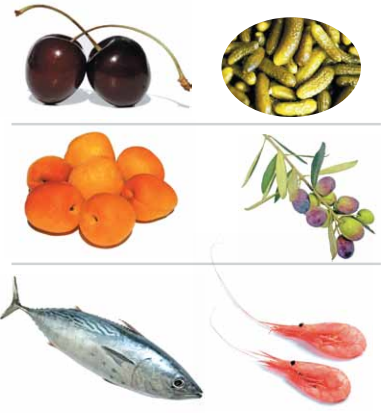


MODEL	POWER	RPM	H (Total Head mSS) = m Q (Volumetric Flow Rate) = m ³ /h											
	kw		H	0	3	6	9	12	15	18	21	24	27	
GTP (4'')	7,5	1500	Q	40	38	35	4							
		3000		85	77	70	45	30	20	8	4			

Values are taken for "WATER" in figure above.



OLIVE TRANSFER PUMP (ZTP) 4''

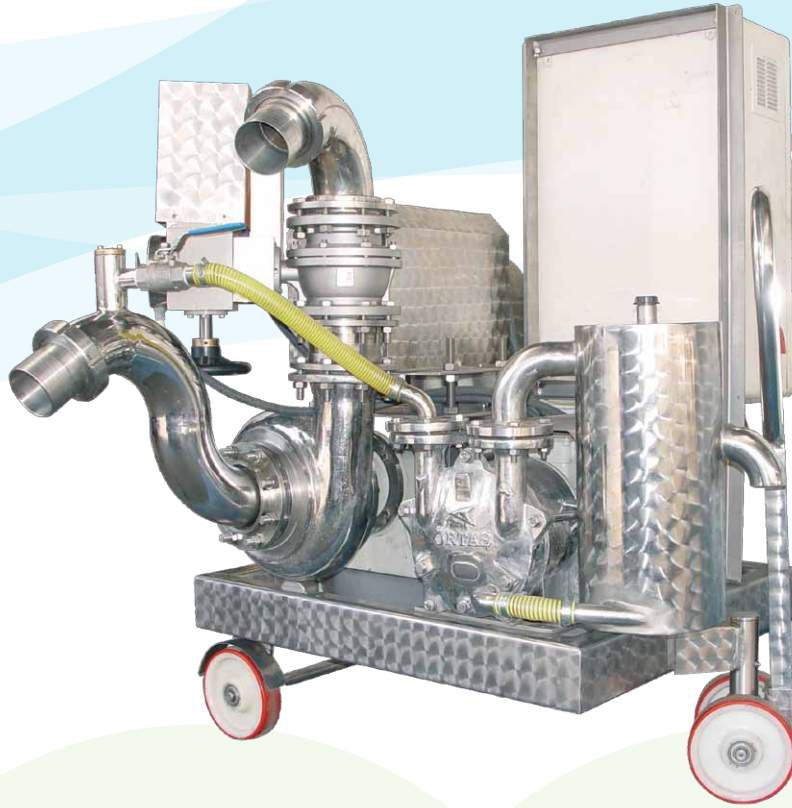


ZTP 's Material Structure

- * Pump body (transfer , vacuum) : AISI 316L
- * Impeller (transfer , vacuum) : AISI 316L
- * Shaft : AISI 316L
- * Valve : AISI 316L
- * fittings materials : AISI 316L
- * Seals
O-ring, mechanical seal
(Depending on the fluid type)

ZTP 's Specifications

- * Max product flow : 70 m³/h
- * Max product temperature : 60°C
- * Max working pressure : 3 bar
- * Max power(Pump) : 7,5 kw
- * Max power(vacuum) : 4 kw
- * Max power(Ball Valve) : 0,37 kw

MODEL	POWER	RPM	H (Total Head mSS) = m												Q (Volumetric Flow Rate) = m ³ /h											
	kw		H	8	10	12	14	16	18	20	24	26	Q	8	10	12	14	16	18	20	24	26				
ZTP (4'')	7,5	1250		49	27	0																				
		1500			65	42	26	10	0																	
		1750					65	43	30	15	0															
		2000						69	66	63																

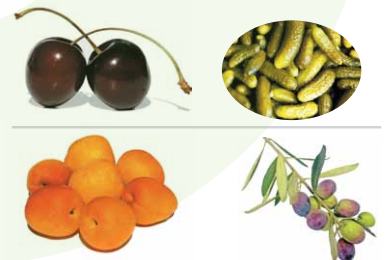

Values are taken for "WATER" in figure above.